

ORWAK®

Environmental Services Ltd.

Model 5010-E

Benefits


- Savings on your waste collection
- Tidy premises
- Space saving
- Ability to segregate waste
- Compliance to meet your legal obligations




BALER

Model 5010-E

- Top loading
- Small machine
- Easy to use
- High performance

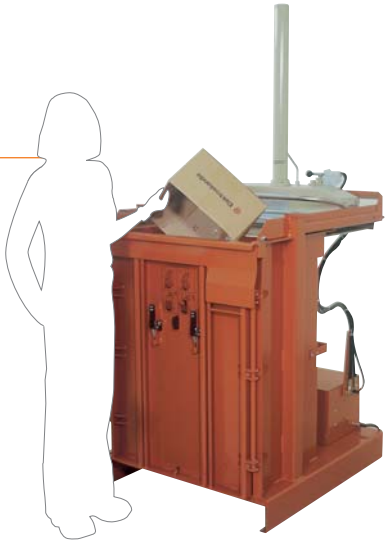

A= 2135
B= 1110
C= 910
D= 1295

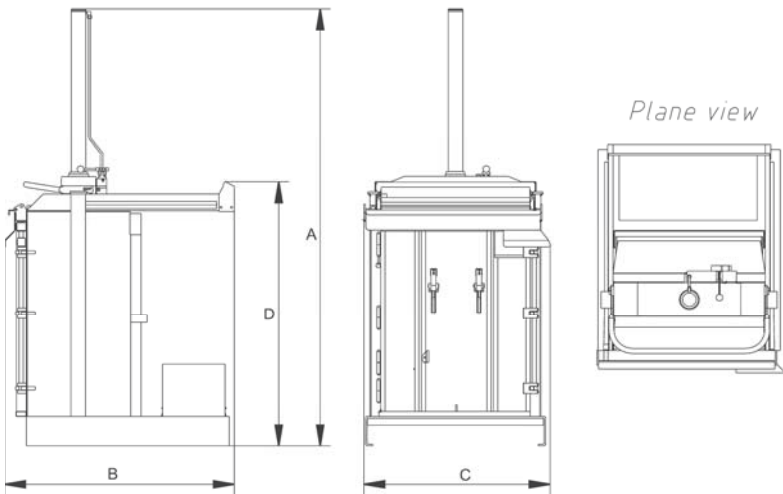

VOLTAGE	FUSE	MOTOR	IP
I phase, 230 V, 50 Hz	10A	0.75 kW, 2780 rpm	55

Example: Total savings:

Number of Uplifts:

Cost:

Comparison:

TECHNICAL SPECIFICATIONS

CYCLE TIME

30 secs

WEIGHT

Chamber:	283 kg
Press unit:	92 kg
Chamber with press unit:	375 kg

DIMENSIONS

Height:	2150 mm
Length:	1100 mm
Width:	880 mm

INSTALLATION DIMENSIONS

Height:	2150 mm
Length (open door):	3080 mm
Width:	2080 mm

CHAMBER DIMENSIONS (INTERNAL)

Length:	500 mm
Width:	700 mm
Height:	1000 mm

BALE SIZE

Length:	500 mm
Width:	700 mm
Height:	700 mm

GROUND COATING

Anti-corrosive primer

TOP COAT

Two part paint and powder coat

RECOMMENDED OIL: TEMP > 0°C

ISO VG 68 SAE 10

RECOMMENDED OIL: TEMP < 0°C

Lubrication Engineering	LE 6520 Monolec
Hydraulic Multigrade	SAE 5W-20

OIL VOLUME

5,2 litres

WORKING PRESSURE

110 bar / 1600 psi

PRESS FORCE

30000 N (3 ton)

RELIEF PRESSURE

130 bar

NOISE LEVEL

< 62 dB (A)

Orwak Environmental Services Ltd,
Unit 6, Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ
Tel: 0121 565 7426 Fax: 0121 565 7427
Email: orwaksales@pws.co.uk Website: www.orwak.co.uk



Printed on recycled paper

a **pws** Group company