

ORWAK® Environmental Services Ltd.

Model 5030

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving




COMPACTOR

Model 5030

- The “bag compactor”
- Bag protected during compaction process
- The flexible compactor



A= 2660
B= 1005
C=785
D= 1935
E= 1100

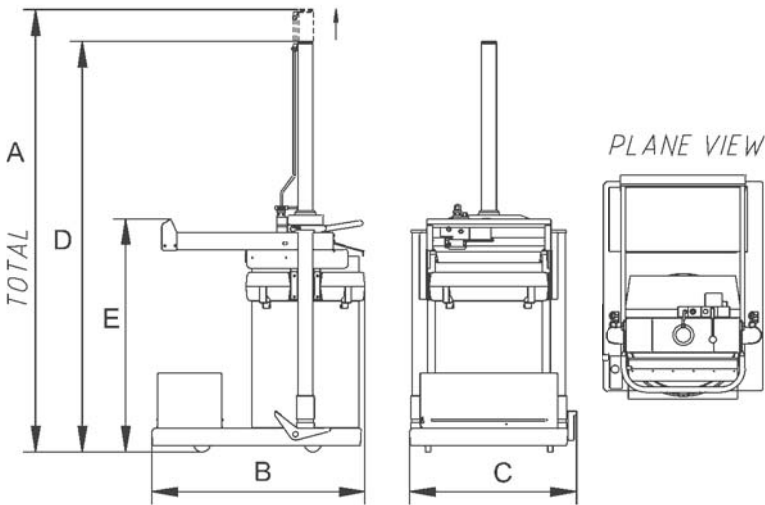

VOLTAGE	FUSE	MOTOR	IP
I phase, 230 V, 50 Hz	10A	0.75 kW, 2780 rpm	55

Example: Total savings:

Number of Uplifts:

Cost:

Comparison:

Orwak Environmental Services Ltd,
Unit 6, Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ
Tel: 0121 565 7426 Fax: 0121 565 7427
Email: orwaksales@phs.co.uk Website: www.orkak.co.uk

TECHNICAL SPECIFICATIONS

CYCLE TIME

30 secs

WEIGHT

Total: 381 kg
Chamber: 310 kg
Press unit only: 71 kg

MACHINE DIMENSIONS

Height: 1935 mm
Width: 785 mm
Length: 1005 mm

RECOMMENDED INSTALLATION DIMENSIONS

Height: 2660 mm
Width: 1935 mm
Length: 2205 mm

FILLING OPENING

500mm

OIL VOLUME

8,2 litres

RECOMMENDED OIL: TEMP > 0°C

ISO VG 68

RECOMMENDED OIL: TEMP < 0°C

Lubrication Engineering LE 6520 Monolec
Hydraulic Multigrade SAE 5W-20

WORKING PRESSURE

110 bar / 1600 psi

PRESS FORCE

30000 N (3 ton)

RELIEF PRESSURE

130 bar / 1900 psi

NOISE LEVEL

< 62 dB (A)



Printed on recycled paper

a **phs** Group company