STATIC COMPACTOR
PD1100

The PD1100 is a powerful compact machine providing maximum performance within a smaller footprint. The PD1100 is supplied with generous loading hoppers to suit many different applications and like its bigger family can be utilised with a number of different sized compaction containers.

Compatible with all UK Chem standard waste containers this Compactor is offered with handling options such as Bin Hoist 'lifting system'. Dock loading Platforms, Refuse Chutes and both standard / individual loading Hopper types.

Associated Product

Static Compactor with Bin Hoist

Associated Product

Balers for further recycling

Associated Product

Wheeled Containers

Key Features

- Achieves **volume reduction** averaging 4/6:1
- Compaction **significantly reduces** your **carbon footprint**
- Produces **major payload** improvements on most materials
- Reduces the need for **unnecessary transportation** of waste and recyclates
- Compaction forces ranging from **26** to **52 tonnes** in operation
- Available in **charge box capacities** ranging from 1.8 to 3.4 cubic metre
- Container 80% and **full warning lights**
- Manufactured from **special steels**
- Built to **Chem standards**
- Safety **loading hoppers** for all applications
- **High performance,** hydraulic systems
- Systems suitable for **loading from floor, loading bay** and **waste chutes**
- For use in conjunction with **UK compaction** containers up to **30 cubic metre**

Ask PDE about the various flexible purchase and rental options available on this product.

Typical Applications

- Food processing factories
- Hospitals
- Hotels
- Shopping Centres and Retail parks
- Universities
- Commercial Properties
- General manufacturing sites

Technical Specification

Charge Box Volume:	1.8 m^3
Compaction Force:	26 Tonnes
CHEM Rating Sweep Volume:	1.2 m^3
Ram Depth:	715 mm
Charge Box Apeture:	1100 mm x 1510 mm
Cycle Time:	45 seconds
Pinning Thrust:	28.0 Tonnes
Length:	3022 mm
Width:	1904 mm
Height:	1283 mm
Electric Motor:	7.5 kw
Control Circuit:	110v
Electric Supply:	3-phase 415v 14.8 amps
Power Requirement:	3-phase + Earth 415v 32 amps

Contact the PDE sales team for a quotation today–

T: 01386 860023
E: sales@pde.uk.com

PDE Waste Technologies Limited,
Nicholas House, Heath Park,
Main Road, Cropthorne, Worcestershire WR10 3NE.
F: *01386 861591* ***Service E:*** *service@pde.uk.com*
W: *www.pde.uk.com*

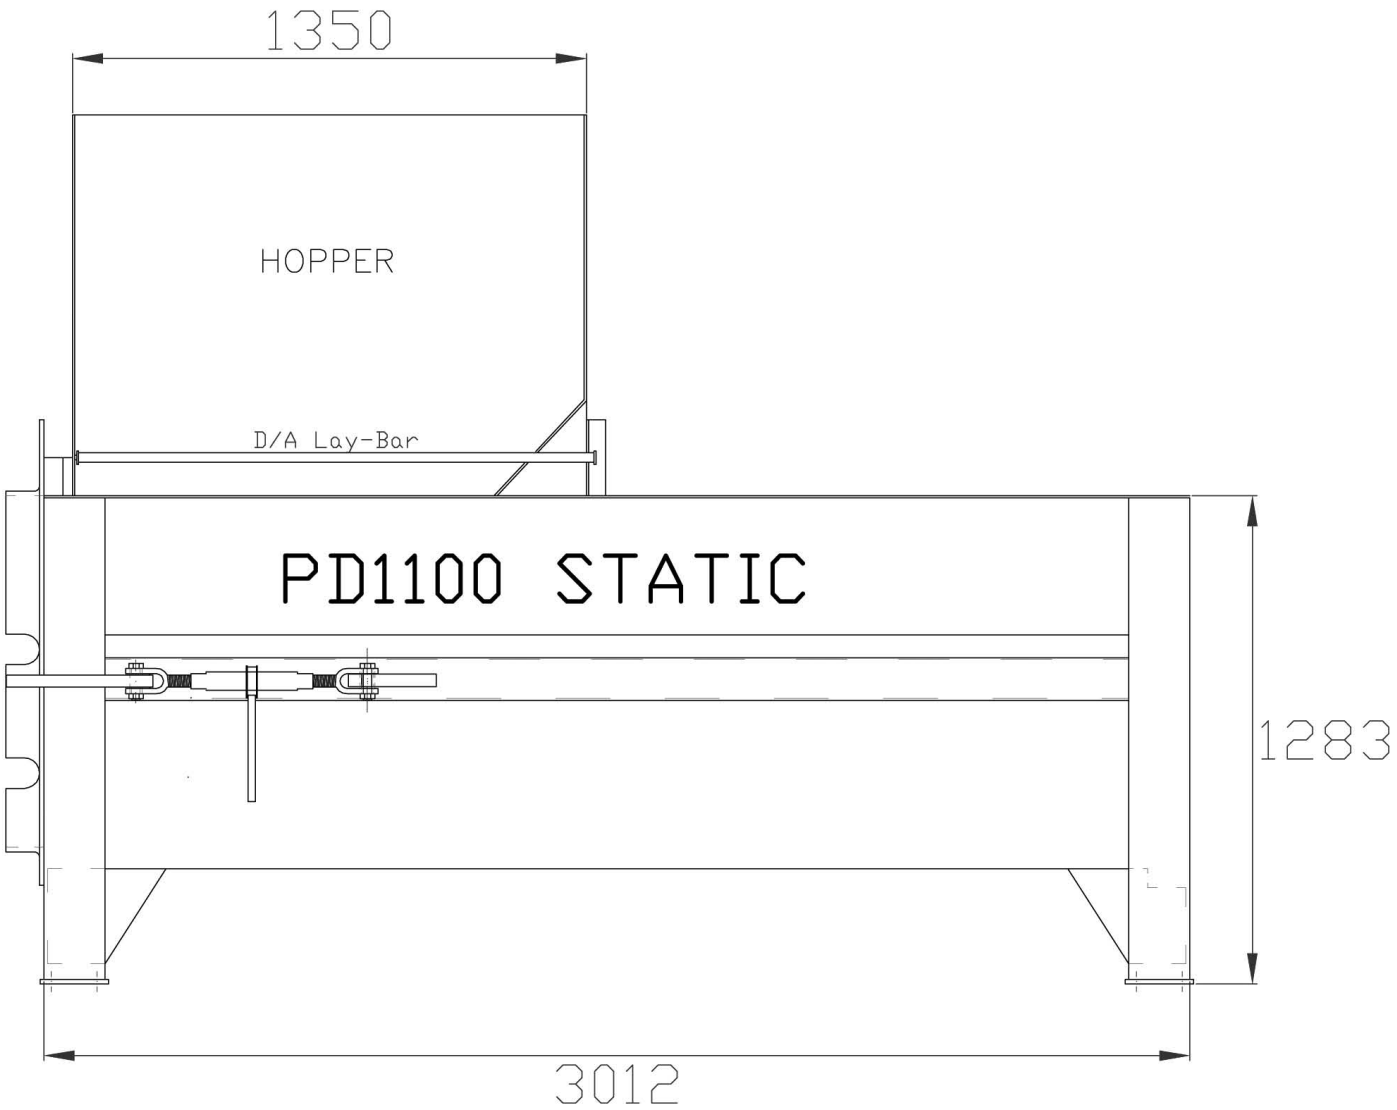
1350
HOPPER
D/A Lay-Bar
PD1100 STATIC
1283
3012